


Cordless Drill Storage

Plans by The Handyman's Daughter
Copyright 2018

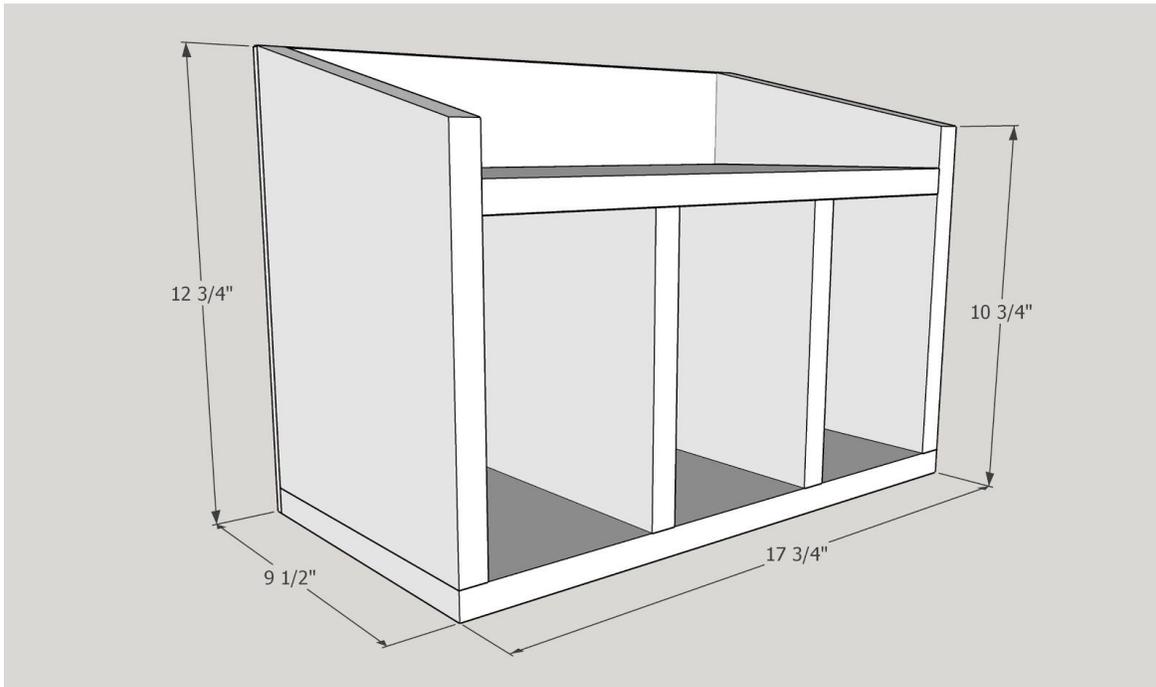

Materials List (refer to my tutorial [here](#) for product links)


- 3/4" thick plywood, MDF, melamine or 1 x 10 board
- Small piece of 1/4" plywood for the back
- Kreg Jig
- 1 1/4" pocket hole screws
- 1/2" brad nails and brad nailer (or staple gun and staples)
- Speed square or combination square

Cut List


- 1 @ 17 3/4" long
- 1 @ 16 1/4" long
- 2 @ 12" long (I cut one end at an angle for easier access, but it's not necessary)
- 2 @ 8" long
- Cut the 1/4" plywood to 17 3/4" x 12 3/4" for the back.

Instructions


Attach the 12" pieces to the 17 3/4" bottom with 1 1/4" pocket hole screws. I cut the top of these pieces at an angle with the front 2" lower than the back to make it easier to take the batteries out of the chargers on the top shelf.

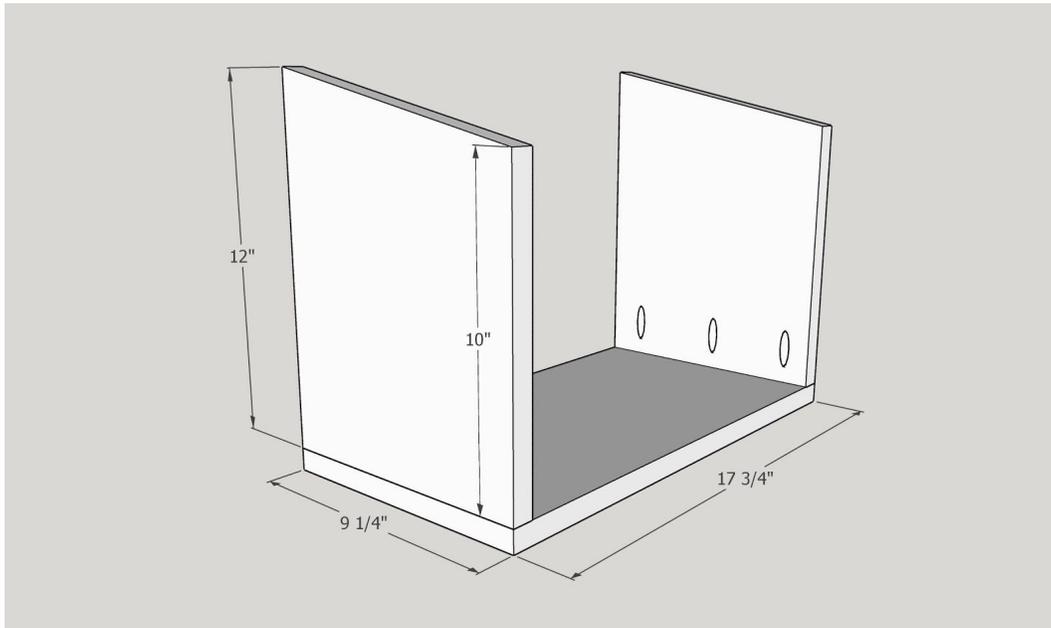


Attach the 8" center dividers about 5" apart with 1 1/2" pocket hole screws.

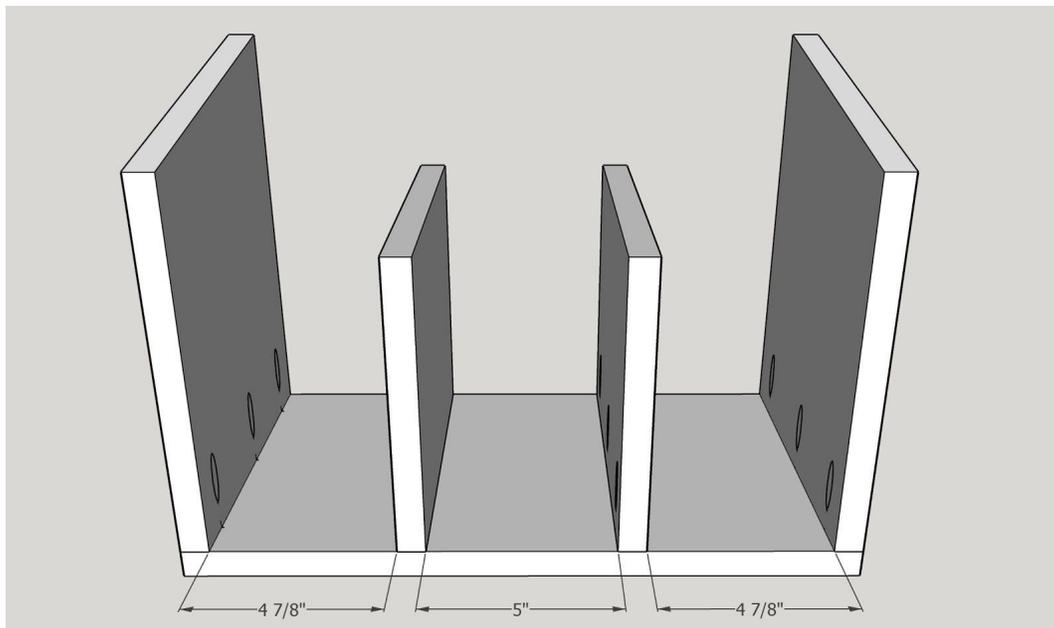

Rest the shelf on top of the 8" center dividers and attach it to the side pieces with 1 1/2" pocket hole screws.

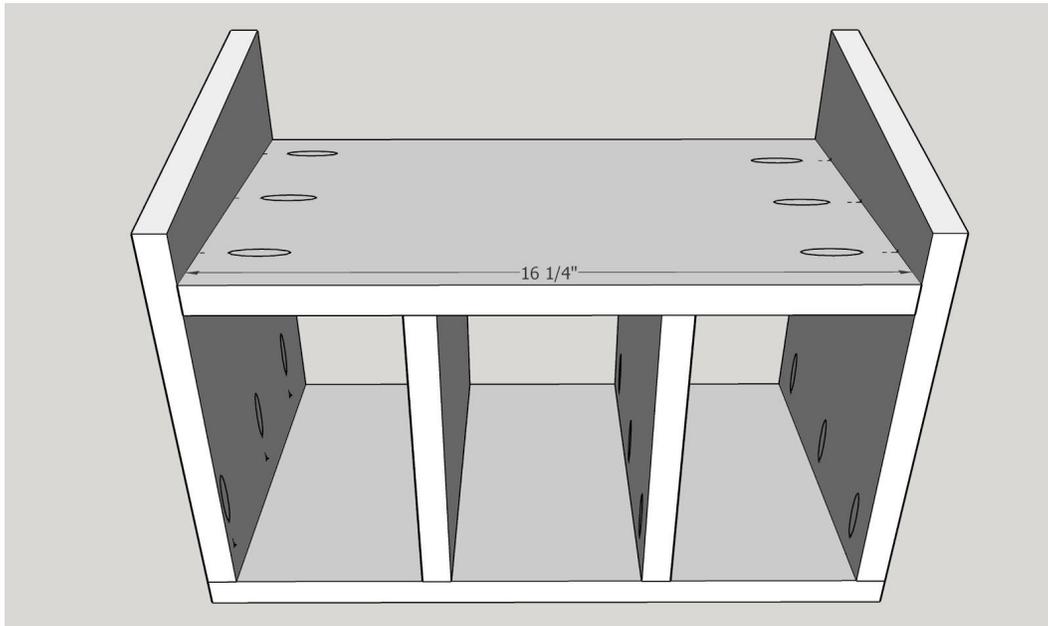

Attach the 1/4" thick plywood backing to the rear of the drill storage box with brad nails or staples.

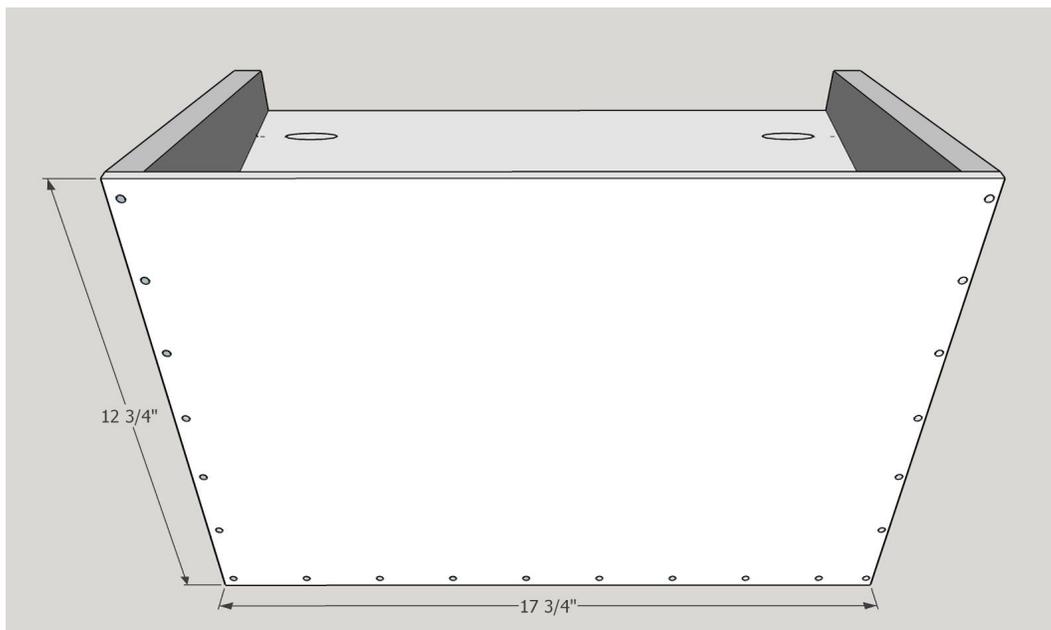

Load it up with your drills, batteries and chargers!