


Adjustable Desktop Organizer

Plans by The Handyman's Daughter

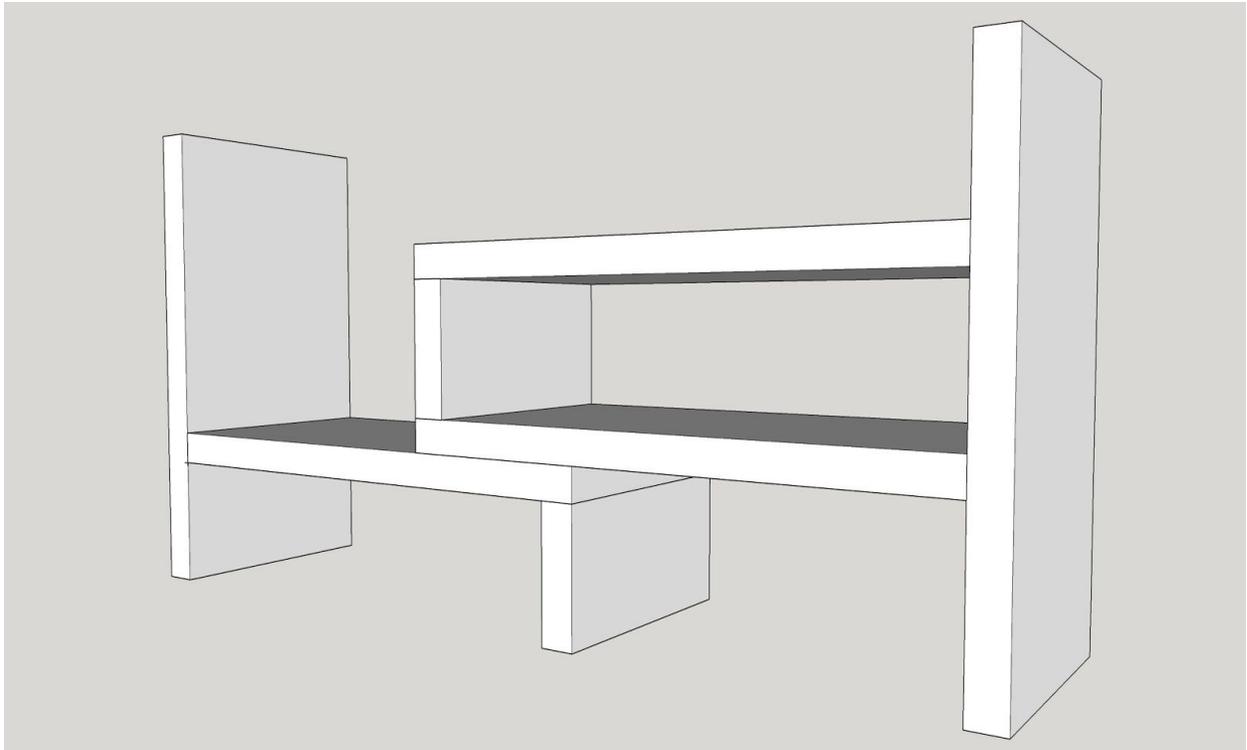

Supply List - See blog post for links to sources


- One 1 x 6 board
- Kreg pocket hole jig
- 1 1/4" pocket hole screws
- Right angle drill attachment (optional, but helpful!)
- 1 1/4" brad nails
- Brad nailer
- Wood glue
- Wood stain or paint

Cut List


- 3 - 1x6 @ 12"
- 2 - 1x6 @ 11 1/4"
- 2 - 1x6 @ 3"

Instructions


Drill pocket holes into one end of each of the 12" pieces. Attach one of the 12" pieces three inches up from the bottom of a 11 1/4" piece, using wood glue and 1 1/4" pocket hole screws.

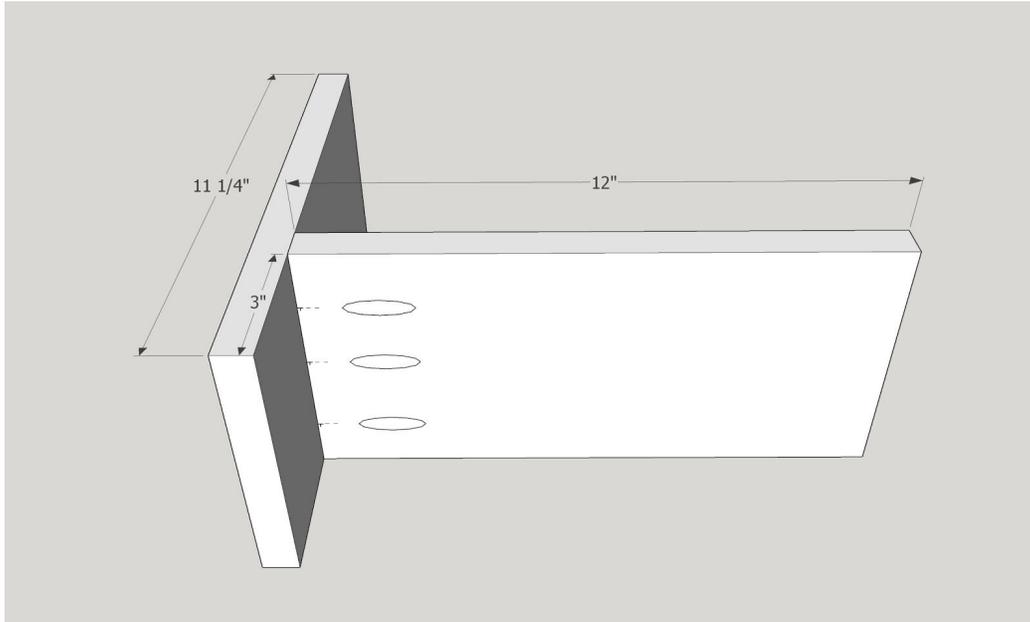


Attach one of the 3" pieces under the other end of the 12" shelf with wood glue and brad nails.

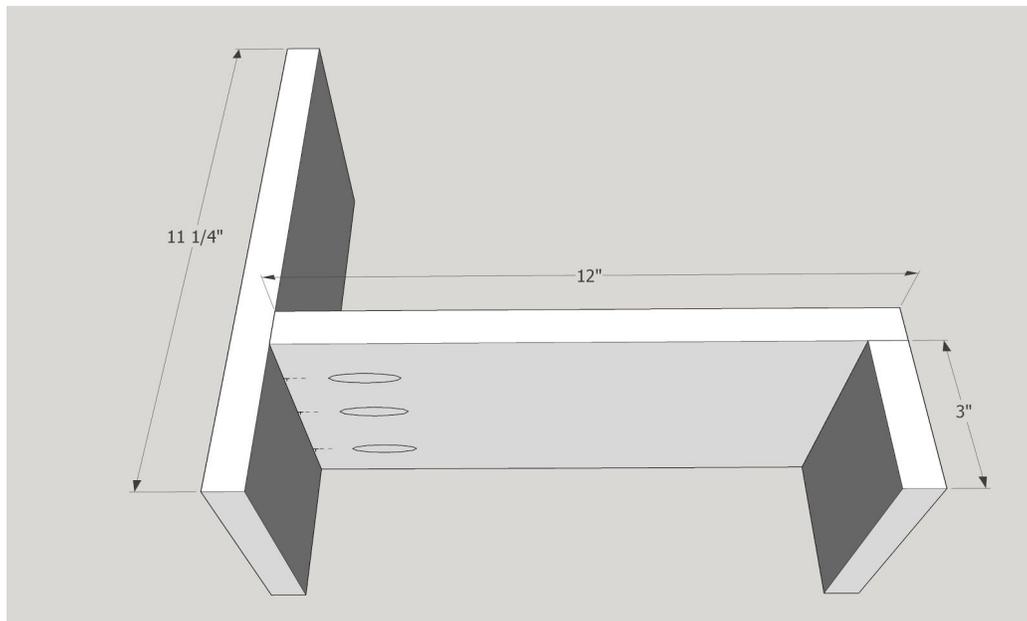


On the other 11 1/4" piece, attach one shelf 3 3/4" up from the bottom.

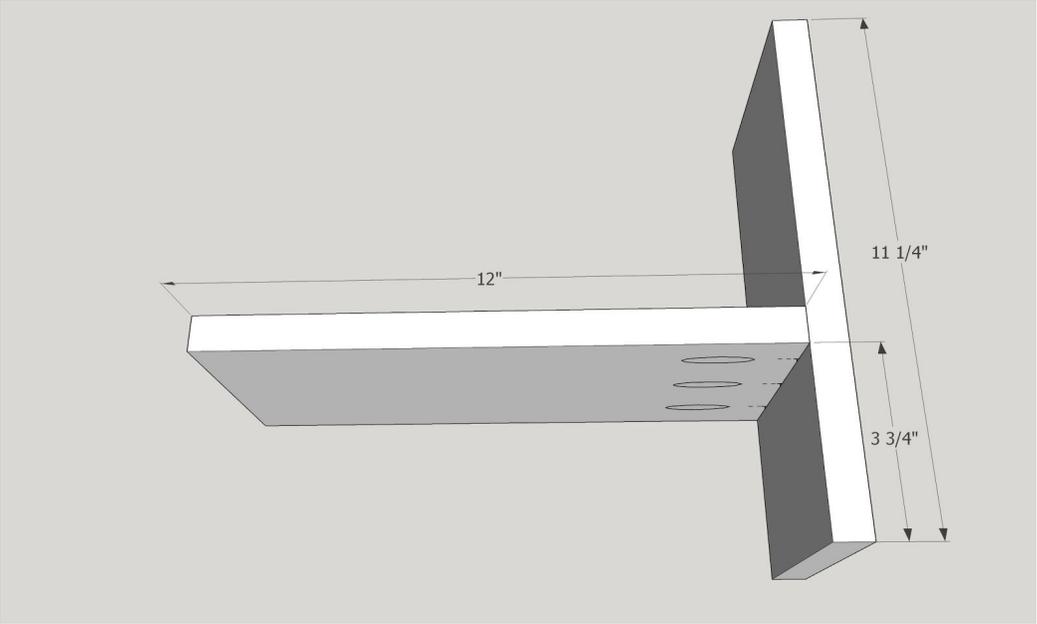

The second shelf is attached 3" above the first.

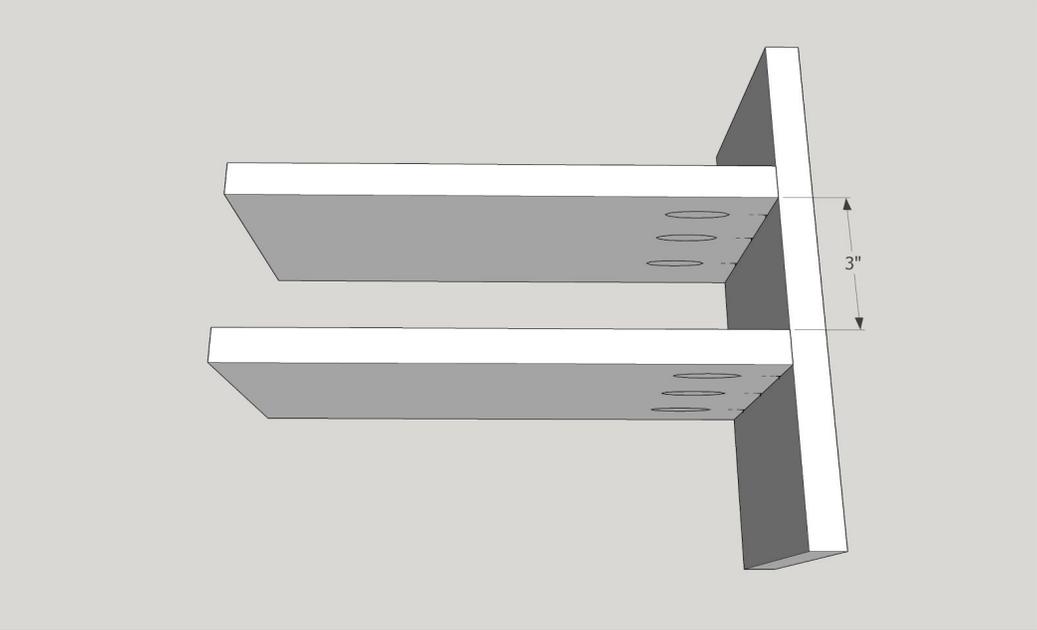

Glue up both ends of the remaining 3" piece and insert it between the two shelves. Nail it into place from above and below.

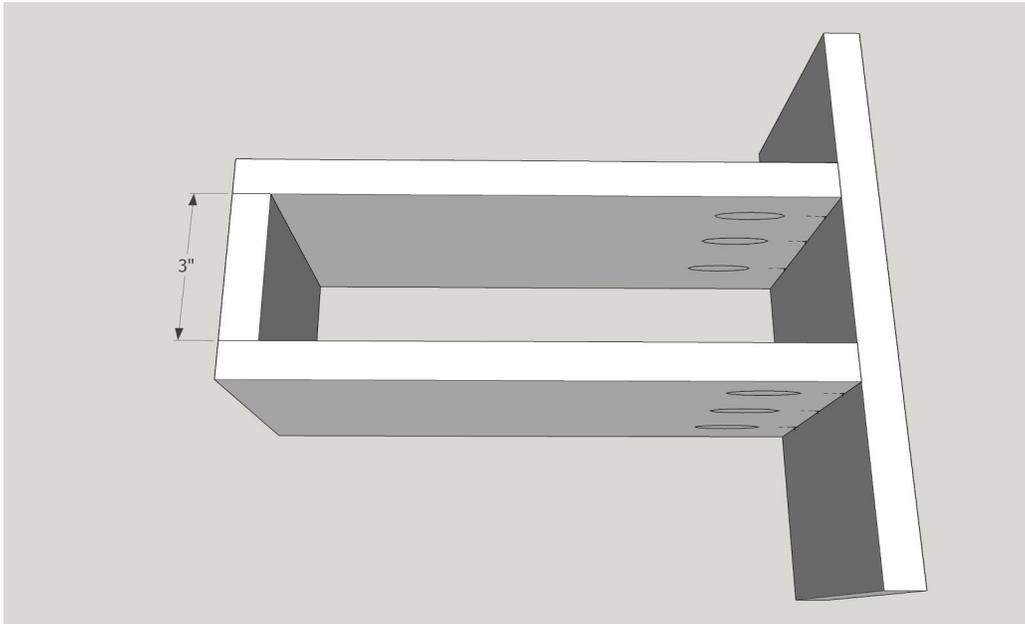

The rectangular shelf rests on top of the other shelf. You can adjust the length of the shelf as needed, or even turn one shelf 90 degrees for a corner configuration!

